



# Rhino FAST FACTS...


## PD-39P Air Operated Post Driver & Accessories List

Illus. No.	Part No.	PD-39P Specifications
		<i>(All drivers are equipped with the exclusive Rhino Alloy, Double Valve Piston.)</i>
1	070016	PD-39P Light Weight Medium Duty Panel Post Driver with a 2 1/8" (53.98 mm) I.D. Chuck, uses 42 CFM (1.19 m <sup>3</sup> /min) @ 90 psi (6.4 kg/cm <sup>2</sup> ). Approx. Wt. 41 lbs (18.6 kg)
2	607000	3/4" (19 mm) Hose Assembly <i>(Order Length Needed)</i>
3	225001	Carrier for Filter-Regulator-Lubricator
4	601128	Filter-Regulator-Lubricator <i>(Used with all Post Drivers for Operator Safety &amp; Post Driver Protection)</i>
5	606600	Air Line Coupler <i>(Optional on F-R-L)</i>
6	606601	Coupler Safety Clip <i>(Optional on F-R-L)</i>
7	230401	Nipple <i>(Optional on F-R-L)</i>
8	100047	Air Hose Reel with 100 ft (30.5 m), 3/4" (19 mm) Air Hose Included
	100048	100 ft (30.5 m), 3/4" (19 mm) Air Hose Assembly
	100295	Air Hose Reel Only
9	995051	Pair/Anti-Vibration Gloves - Size Small
	995052	Pair/Anti-Vibration Gloves - Size Medium
	995053	Pair/Anti-Vibration Gloves - Size Large
	995054	Pair/Anti-Vibration Gloves - Size X-Large
	995055	Pair/Anti-Vibration Gloves - Size XX-Large



# Rhino FAST FACTS...

## PD-39P Air Operated Post Driver & Accessories cont.

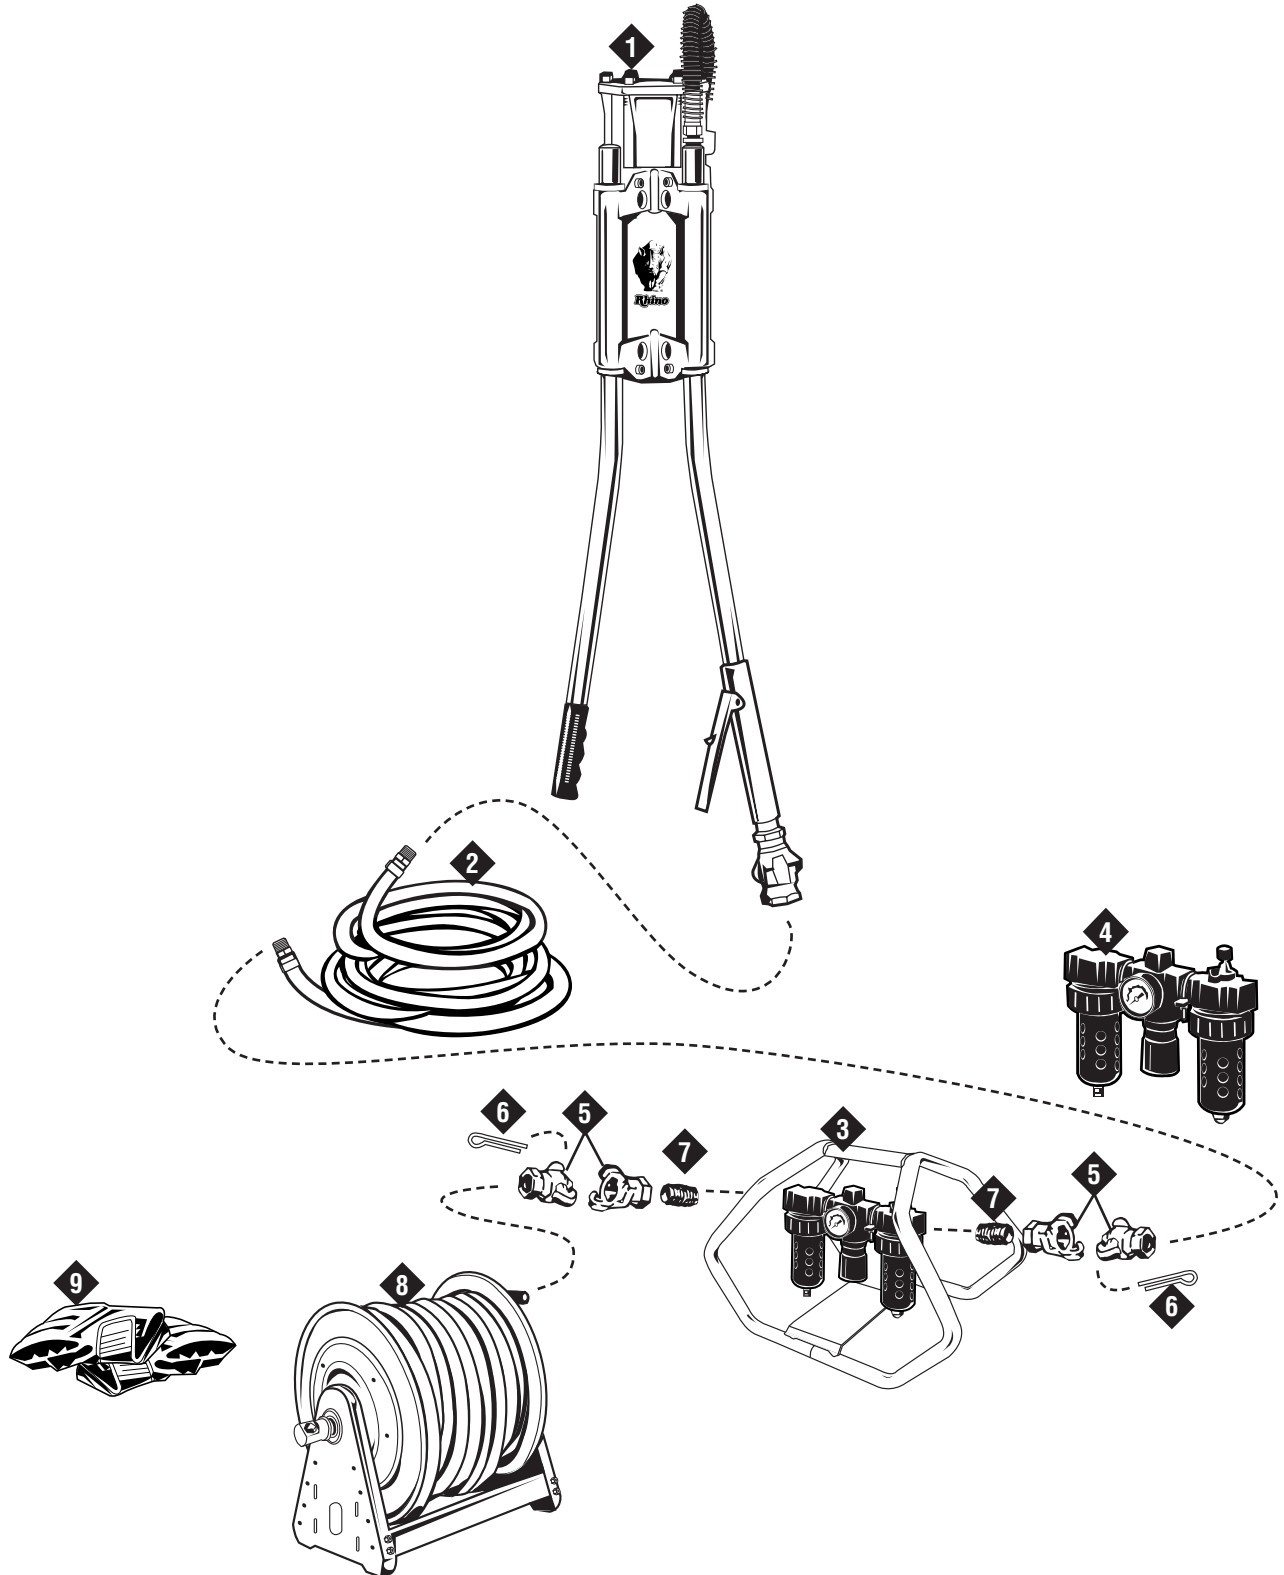

Rhino Tool Company • 620 Andrews Ave., PO Box 111 • Kewanee, IL 61443 • [www.rhinotool.com](http://www.rhinotool.com) • Tel: 309-853-5555 • Fax: 309-856-5905  
Rhino Tool Company has a policy of continuous product improvement and reserves the right to change specifications, designs, or prices at any time without notice or incurring obligations for said changes.

**Rhino** and  are registered trademarks of Rhino Tool Company. © Copyright 2002 Rhino Tool Company

Printed in U.S.A.

Form 253 - 7/07